

SELECTION OF MIXED SAMPLING PLAN INDEXED THROUGH AOQ_{cc} WITH CHAIN SAMPLING PLAN(CHSP)-2 PLAN AS ATTRIBUTE PLAN

*R.Radhakrishnan¹ and K. Esther Jenitha²

¹Department of Statistics, P.S.G. College of Arts and Science, Coimbatore.

²RVS Institute of Management Studies, Coimbatore

*Author for Correspondence

ABSTRACT

In this paper a procedure for the selection of Mixed Sampling Plan (MSP) indexed through AOQ_{cc} which is a convex combination of consumer oriented concept, AOQL (Average Outgoing Quality Limit) and producer oriented concept, MAAOQ (Maximum Allowable Average Outgoing Quality) with Chsp-2 plan as attribute plan is given. This plan may safeguard the interests of both producer as well as consumer by properly choosing a right combination using the gain parameter λ ($0 < \lambda < 1$). Tables are also constructed for the easy selection of the plan.

Key Words: Operating Characteristic Curve, Average Outgoing Quality Limit, Maximum Allowable Percent Defective, Maximum Allowable Average Outgoing Quality, Poisson Distribution, Convex Combination

INTRODUCTION

The AOQL is the average quality that the consumer will receive in the long run when the defective items are replaced by non-defective items. The construction of sampling plans based on AOQL is largely consumer oriented and MAAOQ is the average outgoing quality at the inflection point is a producer oriented, which is the average outgoing quality at MAPD. The advantage of using MAAOQ for designing a sampling plan instead of AOQL is that it reduces the sample size to be inspected which indirectly reduces the total cost. The use of MAAOQ for deriving sampling plans was justified by Suresh and Ramkumar (1996). Radhakrishnan (2002) studied various sampling plans indexed through MAPD and MAAOQ. Radhakrishnan and Mallika (2008) constructed single sampling plans indexed through AOQ_{cc}. Radhakrishnan and Esther Jenitha (2011a, 2011b, 2011c, 2011d) constructed continuous sampling plan of the type CSP, CSP-3, CSP V (i-2x), Continuous Sampling Plan of the Type T CSP-3 plan indexed through AOQ_{cc} which is the convex combination of AOQL and MAAOQ. In this paper an attempt is made to introduce AOQ_{cc} in MSP using Chsp-2 plan as an attribute plan. This plan may safeguard the interests of both producer as well as consumer by choosing a right combination using the gain parameter λ .

Sampling plans indexed through p^* (MAPD) which is the quality level corresponding to the inflection point of the operating characteristic (OC) curve has been explained by Mandelson (1962), Mayer (1967) and further studied by Soundararajan (1975). The MAPD is the value of fraction defective ($p = p^*$) at which

$$\begin{aligned} d^2P_a(p)/dp^2 &= 0, \text{ for } p = p^* \\ d^2P_a(p)/dp^2 &< 0, \text{ for } p < p^* \\ \text{and } d^2P_a(p)/dp^2 &> 0, \text{ for } p > p^* \end{aligned}$$

A variety of plans and procedures have been developed for special sampling situations involving both measurements and attributes. Each is tailored to do a specific job under prescribed circumstances. They range from a simplified variables approach to a more technically complicated combination of variables and attributes sampling in a so-called mixed sampling plans. Mixed sampling plan is a two stage sampling procedure involving variables inspection in the first stage and attributes inspection in the second stage if the variables inspection of the first sample does not lead to acceptance. Use of variables on the first

Research Article

sample with attributes on the second sample combines the economy of variables for quick acceptance on the first sample with the broad non-parametric protection of attributes sampling when a questionable lot requires a second sample.

The mixed sampling plans are initially introduced by Dodge (1932) and later developed by Bowker and Goode (1952). Schilling (1967) has given a method for determining the operating characteristics for mixed variables-attributes sampling plans. Using Schilling's procedure, Devaarul (2003) has constructed mixed sampling plan. Sampath Kumar (2007) constructed mixed sampling plan with several plans as attribute plans indexed through the parameters MAPD, AOQL and MAAOQ.

Glossary of Symbols

The symbols used in this paper are as follows:

- \bar{X} : sample mean
- σ : population standard deviation
- p : submitted quality of lot or process
- p_j : submitted quality of lot or process 'j'
- $P_a(p)$: probability of acceptance for given quality p
- p^* : maximum allowable percent defective (MAPD)
- p_m : the product quality at which AOQ is maximum
- p_t : the point at which the inflection tangent of the OC curve cuts the 'p' axis
- h^* : relative slope at ' p^* '
- n_1 : sample size for variable sampling plan
- $n_{1,2}$: first sample size for attribute sampling plan
- $n_{2,2}$: second sample size for attribute sampling plan
- i : The number of previous samples
- β_j : probability of acceptance for lot quality p_j
- β_j' : probability of acceptance assigned to first stage for percent defective p_j
- β_j'' : probability of acceptance assigned to second stage for percent defective p_j
- $z(j)$: 'z' value for the j^{th} ordered observation
- $z(p)$: standard normal deviate
- k : variable factor such that a lot is accepted if $\bar{X} \leq A = U - k\sigma$.

Formulation of MSP with Chsp-2

Procedure: Independent Plan

Determine the four parameters of the mixed plan n_1 , n_2 , k and ' i ' with reference to ASN and OC curves

Take a random sample of size n_1 from the lot assumed to be large

If the sample average $\bar{X} \leq A = U - k\sigma$, accept the lot

If the sample average $\bar{X} > A = U - k\sigma$, take a second sample of size n_2

Test the sample of size n_2 and

- (i) Accept the lot, if
 - (a) no defectives are found in the sample
 - (b) one or two defectives are found in the sample but no defectives were found in the previous ' i ' samples
- (ii) Reject the lot, otherwise

Construction of MSP With Chsp-2 Plan as Attribute Plan Indexed Through MAPD

The general procedure given by Schilling (1967), is used for constructing the mixed sampling plan having chain sampling plan of the type Chsp-2 plan as attribute plan indexed through MAPD (p^*) [for $\beta_j'' = (\beta_j - \beta_j') / (1 - \beta_j')]$.

Construction of Tables

The probability of acceptance for ChSP-2 plan under Poisson model is given by

Research Article

$$Pa(p) = P_0 + P_2 P_0^i + \frac{P_1 P_0^i}{1 - P_1}$$

$$\text{where } P_0 = e^{-n_2 p}, P_1 = n_2 p e^{-n_2 p} \text{ and } P_2 = \frac{(n_2 p)^2 e^{-n_2 p}}{2}$$

The inflection point (p_*) is obtained by using $[d^2 Pa(p)/dp^2] = 0$ and $[d^3 Pa(p)/dp^3] \neq 0$. The relative slope of the OC curve $h_* = \left[\frac{-p}{Pa(p)} \right] \frac{dPa(p)}{dp}$ at $p = p_*$. The inflection tangent of the OC curve cuts the 'p' axis at $p_t = p_* + (p_*/h_*)$. The values of h_* , $n_2 p_*$, $n_2 p_t$ and $R = p/p_*$ are calculated for $\beta_*' = 0.60$ using visual basic program and presented in Table 1.

The general procedure for designing a Chsp-2 plan indexed through a parameter which is a convex combination of AOQL and MAAOQ using Poisson distribution as base line distribution is given below.

Step 1. Determine n_2 MAAOQ and n_2 AOQL for Chsp-2 for various combinations of i and $n_2 p_*$. Find $R_1 = n_2 \text{AOQL} / n_2 p_*$ and $R_2 = n_2 \text{MAAOQ} / n_2 p_*$.

Step 2. Find $n_2 \text{AOQ}_{cc} = \lambda n_2 \text{AOQL} + (1 - \lambda) n_2 \text{MAAOQ}$ and $R_3 = n_2 \text{AOQ}_{cc} / n_2 p_*$ for selected values of λ .

Step 3. Present the results of Step 1 and Step 2 in Table 1.

Selection of the Plan

The Table 1 is used to construct the plan when MAPD and AOQ_{cc} are specified. One can find the ratio $R_3 = \text{AOQ}_{cc} / \text{MAPD}$ and locate the value in Table 1 under the column R_3 (for a fixed values of λ) and the corresponding values of i and $n p_*$ are noted. The value of n is determined using $n = n p_* / \text{MAPD}$ and hence the parameters, n and i are determined.

Example 1 :

(i) For a specified $\text{AOQL} = 0.0037$ and $p_* = 0.007$ compute the ratio $R_1 = \text{AOQL} / p_* = 0.5286$ which is associated with $i=11$ in Table 1 and $n_2 = n_2 p_* / p_* = 0.2233/0.004 = 32$. Thus $n_{1,2}=32$, $n_{2,2}=32$, $i=11$ are the parameters selected for the MSP with Chsp-2 as attribute plan for a specified $p_* = 0.007$, $\text{AOQL} = 0.0037$.

(ii) For a specified $\text{MAAOQ} = 0.0042$ and $p_* = 0.007$ compute the ratio $R_2 = \text{MAAOQ} / p_* = 0.6000$ which is associated with $i=1$ in Table 1 and $n_2 = n_2 p_* / p_* = 1.0833/0.007 = 155$. Thus $n_{1,2}=155$, $n_{2,2}=155$, $i=1$ are the parameters selected for the MSP with Chsp-2 as attribute plan for a specified $p_* = 0.007$, $\text{MAAOQ} = 0.0042$.

(iii) For a specified value of $\text{AOQL} = 0.0037$, $\text{MAAOQ} = 0.0042$ and $p_* = 0.007$ and $\lambda = 0.3$, $\text{AOQ}_{cc} = 0.00405$ compute $R_3 = \text{AOQ}_{cc} / p_* = 0.5785$ with $i=2$ in Table 1 and $n_2 = n_2 p_* / p_* = 0.8053/0.007 = 115$. Thus $n_{1,2}=115$, $n_{2,2}=115$, $i=2$ are the parameters selected for the MSP with Chsp-2 as attribute plan for a specified $p_* = 0.007$, $\text{AOQL} = 0.0037$, $\text{MAAOQ} = 0.0042$.

Practical Application

Suppose the plan with $n_1 = 10$, $k = 1.5$ is to be applied to the lot-by-lot acceptance inspection of pipe from a production line, the characteristic to be inspected is the "pipes diameters in mm" for which there is a specified upper limit (U) of 45mm with a known standard deviation (σ) of 0.006 mm.

In this example, $U = 45$ mm, $\sigma = 0.006$ mm and $k = 1.5$

Now, in applying the variable inspection first, take a random sample of size $n_1 = 10$ from the lot. Record the sample results and find \bar{X} . If $\bar{X} \leq A = U - k \sigma = 44.991$ mm, accept the lot otherwise take a random sample of size $n_2 = 115$ and apply attribute inspection.

Under attribute inspection, by taking Chsp-2 Plan as attribute plan, if the manufacturer fixes the values $\beta_*' = 0.35$, $p_* = 0.007$ (7 non-conformity pipes out of 1000) and the consumer fixes the quality level $\text{AOQ}_{cc} = 0.00405$ (405 non-conformity pipes out of 100000 pipes) then select a sample of 115 pipes. Test the sample of size n_2 and Accept the lot, if no defectives are found in the sample or one or two defectives are found in the sample but no defectives were found in the previous '2' samples, otherwise Reject the lot.

Research Article

The OC and AOQ curves for the above Example are represented in Figure 1 and Figure 2 respectively

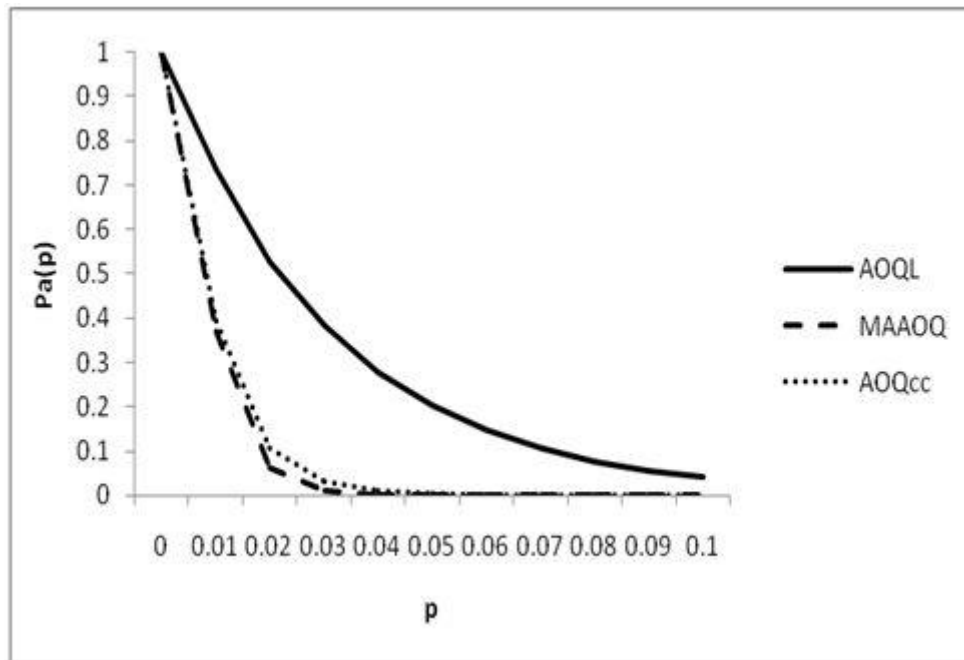


Figure 1: OC curves for $n_{1,2}=32, n_{2,2}=32, i=11$ (AOQL) $n_{1,2}=155, n_{2,2}=155, i=1$ (MAAOQ) $n_{1,2}=115, n_{2,2}=115, i=2$ (AOQ_{cc})

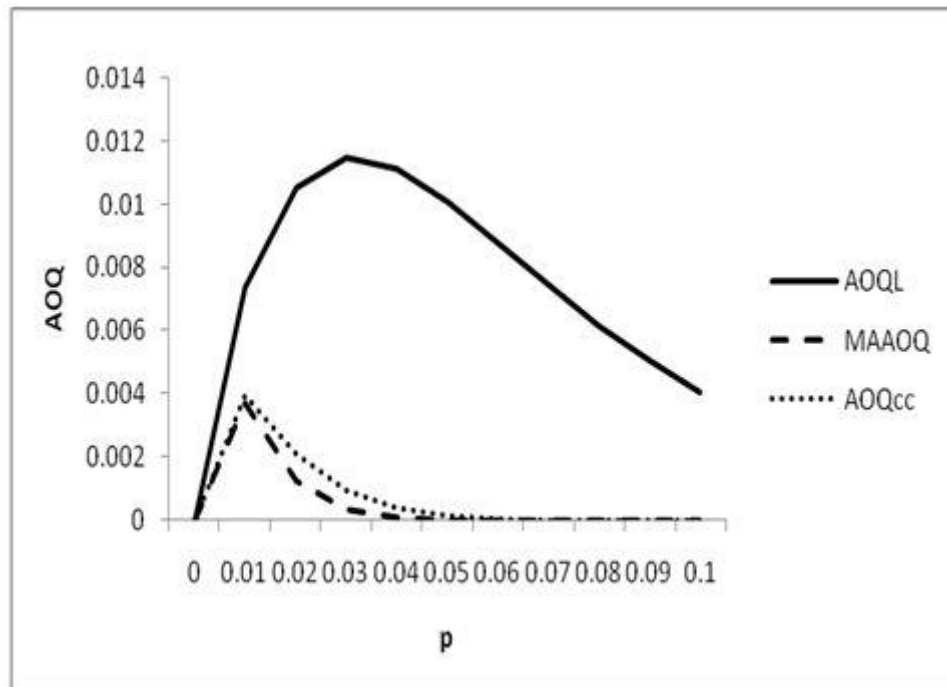


Figure 2: AOQ curves for $n_{1,2}=32, n_{2,2}=32, i=11$ (AOQL) $n_{1,2}=155, n_{2,2}=155, i=1$ (MAAOQ) $n_{1,2}=115, n_{2,2}=115, i=2$ (AOQ_{cc})

Research Article

CONCLUSION

In this paper an attempt is made to construct mixed sampling plans indexed through AOQ_{cc} , a convex combination of AOQL, consumer's preference and MAAOQ, producer's preference with the gain parameter λ using Chsp-2 plan as attribute plan. $nAOQ_{cc}$ values are also presented for the selected values of λ (0.3,0.6) in Table1. These sampling plans will safeguard the interest of both producer as well as consumer by choosing a right combination of the gain parameter λ . These plans will help the floor engineers to suggest the quality level AOQ_{cc} after knowing the interest of both producer and consumer which can be understood from OC and AOQ curves. This work can be extended for mixed sampling plan using other plans as attribute plan.

Table 1: Parameters of Mixed Sampling plan Chsp-2 for $\beta_*' = 0.35$, $\beta_m' = 0.35$

I	n_2p^*	n_2AOQL	R_1	$nMAAOQ$	R_2	$\lambda=0.3$		$\lambda=0.6$	
						$nAOQ_{cc}$	R_3	$nAOQ_{cc}$	R_3
1	1.0833	0.5972	0.5513	0.6518	0.6017	0.6457	0.5961	0.6308	0.5823
2	0.8053	0.4116	0.5111	0.4738	0.5883	0.4748	0.5896	0.4593	0.5703
3	0.6305	0.3398	0.5389	0.3937	0.6245	0.4111	0.6520	0.4019	0.6375
4	0.5690	0.2714	0.4771	0.3780	0.6643	0.3798	0.6675	0.3775	0.6635
5	0.4342	0.2115	0.4870	0.3037	0.6994	0.3616	0.8328	0.3691	0.8500
6	0.3751	0.1626	0.4335	0.2734	0.7289	0.3495	0.9318	0.3663	0.9766
7	0.3303	0.1397	0.4229	0.2489	0.7535	0.3399	1.0291	0.3660	1.1080
8	0.2947	0.1365	0.4632	0.2282	0.7745	0.3317	1.1254	0.3666	1.2440
9	0.2664	0.1182	0.4438	0.2110	0.7920	0.3258	1.2229	0.3667	1.3766
10	0.2430	0.1257	0.5172	0.1961	0.8071	0.3197	1.3158	0.3672	1.5113
11	0.2233	0.1204	0.5392	0.1832	0.8203	0.3151	1.4110	0.3675	1.6456
12	0.2066	0.1182	0.5722	0.1719	0.8318	0.3109	1.5049	0.3676	1.7793
13	0.1923	0.1172	0.6093	0.1619	0.8418	0.3073	1.5978	0.3677	1.9123
14	0.1798	0.1168	0.6494	0.1530	0.8508	0.3040	1.6908	0.3678	2.0457
15	0.1689	0.1164	0.6894	0.1450	0.8588	0.3011	1.7828	0.3678	2.1779

REFERENCES

- Bowker AH, Goode HP (1952).** *Sampling Inspection by Variables*. McGraw Hill, New York.
- Devarrul S (2003).** Certain Studies Relating to Mixed Sampling Plans and Reliability Based Sampling Plans. Ph.D thesis, Bharathiar University, Coimbatore, India.
- Dodge (1932).** Statistical control in sampling Inspection. *American Mechanist* 1085-1088 and 1129-1131.
- Mandelson J (1962).** The Statistician, The Engineer and sampling plans. *Industrial Quality control* **19** (5) 12-15.
- Mayer PL (1967).** A note on sum of Poisson Probabilities and an application. *Annals of Institute of Statistical Mathematics* **19** 537-542.
- Radhakrishnan R (2002).** Contribution to the study on selection of certain acceptance sampling plans. Ph.D thesis, Bharathiar University, Coimbatore, India.
- Radhakrishnan R, Mallika M (2008).** Designing of Sampling plans indexed through the convex combination of AOQL and MAAOQ. Published as a proceedings of the National level Conference on IT and Business Intelligence organized by Institute of Management Technology, Nagpur, India Excel publishers 45-52.
- Radhakrishnan R, Esther Jenitha K (2011a).** Construction of Continuous Sampling Plan Indexed through AOQ_{cc} . *International Journal of Statistics & Systems* **6** 145-152.

Research Article

Radhakrishnan R, Esther Jenitha K (2011b). Construction of CSP – 3 indexed through AOQ_{cc} . *Global Journal of Mathematical Sciences: Theory & Practical (GJMS)* **3**(1) 93-100.

Radhakrishnan R, Esther Jenitha K (2011c). Construction of CSP of the type CSP V ($i=2x$) indexed through the convex combination of AOQL & MAAOQ. *Research in Management: A Contemporary Approach (VIIMS Conference Proceedings)* 33-35.

Radhakrishnan R, Esther Jenitha K (2011d). Construction of CSP of the type Tightened CSP-3 indexed through the convex combination of AOQL & MAAOQ. *International Journal of Mathematical Sciences & Applications* **1**(2) 727-735.

Sampath Kumar R (2007). Construction and selection of mixed variables-attributes sampling plans. Ph.D thesis, Bharathiar University, Coimbatore, India

Schilling EG (1967). A general method for determining the operating characteristics of mixed variables. Attribute sampling Plans single side specifications, S.D known, Ph.D thesis Rutgers, The State University, New Brunswick, New Jersey.

Soundararajan V (1975). Maximum allowable percent defective (MAPD) single sampling inspection by attribute plan. *Journal of Quality Technology* **7**(4) 173-177.

Suresh KK , Ramkumar TB (1996). Selection of a sampling plan indexed with maximum allowable average outgoing quality. *Journal of Applied Statistics* **23**(6) 643-655.