

Research Article

DIELECTRIC MEASUREMENT OF AZARDICHITA INDICA (LEAVES) AT 9.85 GHz FREQUENCY

***Govind Apparao Karhale**

*Department of Physics, Madhavrao Patil Arts, Commerce and Science College, Palam,
 Dist. Parbhani (M.S.) India*

**Author for Correspondence: karhalega@gmail.com*

ABSTRACT

The effect of packing density, moisture content, and temperature on dielectric parameters such as dielectric constant (ϵ'), dielectric loss (ϵ''), loss tangent ($\tan\delta$), relaxation time (τ_p), conductivity (σ_p) for *Azardichita Indica* (leaves) in powder form was assessed. The results show that, there was a systematic increase in dielectric constant (ϵ') and loss factor (ϵ'') with increasing values of relative packing fraction (δ_r) and decrease in dielectric constant and loss factor with increasing temperature. The moisture percentage measured by Thermo-gravimetric method. Experimental results of different relative packing fractions were further used to obtain transformation to 100% solid bulk using correlation equations of Landau-Lifshitz- Looyenga and Bottcher. The result shows that, there is a fair agreement between experimental values and theoretical values of different dielectric parameters.

Keywords: *Dielectric constant, Loss, Relaxation time, Conductivity, Packing fractions, Azardichita indica*

INTRODUCTION

Dielectric properties have been discussed in detail from an electric viewpoint (Kraszewski and Nelson, 1994) and in terms of electromagnetic field concepts. To obtain useful information of various kinds of medicinal products, the study of dielectric behavior from microwave absorption is of great value. The dielectric properties of medicinal products describe interaction (Bansal, 2001; Gandhi, 1996; Nelson, 1993) with microwave energy and depend on frequency of electromagnetic field as well as on bulk particle properties of the materials such as moisture content, density, temperature, packing fraction and composition. The dielectric heating effect on germination early growth of medicinal, agricultural products, improvement in nutritional quality, stored-grain insect control, drying of grains etc., is of great importance to know the actual process at molecular level. To get some information, dielectric properties of *Azardichita Indica* -leaves were determined at various packing fractions and temperature.

MATERIALS AND METHODS

Dielectric constant (ϵ') and dielectric loss (ϵ'') were measured by using reflectometric technique (Chelkowski, 1980; Sisodia, 1990). Measuring the reflection co-efficient from air dielectric boundary of sample in the microwave X – band at 9.85 GHz frequency at 20°, 35° and 50°C temperature. The following equations were used to determine the dielectric parameters.

$$\epsilon' = \left(\frac{\lambda_0}{\lambda_c} \right)^2 + \left(\frac{\lambda_0}{\lambda_d} \right)^2 \dots\dots\dots (1)$$

$$\epsilon'' = \frac{1}{\pi} \left(\frac{\lambda_0}{\lambda_d} \right)^2 \alpha_d \beta_d \dots\dots\dots (2)$$

Where,

Research Article

λ_0 = the wavelength in free space.

$\lambda_c = 2a$ is cut-off wavelength of the wave guide.

a – is broader dimension of the rectangular wave guide.

αd = is the attenuation introduced by the unit length of the dielectric materials.

$\beta d = 2\pi\lambda_d$ is phase shift introduced by the unit length of the dielectric materials.

λ_d = wavelength in the dielectric powder.

Detail regarding the procedure is given in (Kalamse and Kalamse, 2007). In the present investigation, small quantity of powder was introduced in the cell and the plunger was brought over the powder column. A pressure was allowed to exert by plunger on powder in the dielectric cell. The height of the powder column and the corresponding reflection co-efficient was measured by means of a crystal pick-up in the directional coupler. This process was repeated at every addition of powder in the cell. The relationship between reflected power and height of the powder column was approximately given by a damped sinusoidal wave. The distance between two adjacent minima's of the curve gave half the dielectric wavelength ($\lambda_d = 2L$).

For the determination of dielectric parameters of *Azardichita Indica*, leaves three samples of various particle sizes were prepared by using sieves of different size. For the comparison of correlation formulae between powder and bulk, the packing fraction (δ_r) were taken as the ratio of density of powder and the density of the finest crushed closely packed particle assembly of the sample. The conductivity (σ_p) and relaxation time (τ_p) were obtained by using following relations.

$$\sigma_p = \omega \epsilon_0 \epsilon'' \quad \dots\dots\dots (3)$$

$$\tau_p = \frac{\epsilon''}{\omega \epsilon'} \quad \dots\dots\dots (4)$$

Where,

ω - is angular frequency of measurement (9.85 GHz).

ϵ_0 - is permittivity of free space.

For low loss materials, dielectric constant (ϵ') and loss factor (ϵ'') for bulk materials can be correlated with their powder form by the relations derived independently by Landau-Lifshitz and Looyenga, (Landau and Lifshitz, 1960).

$$\epsilon'_s = \frac{[(3\delta + 2\epsilon'_p - 2)\epsilon'_p]}{(3\delta - 1)\epsilon'_p + 1} \quad \dots\dots\dots (5)$$

$$\epsilon''_s = \left(\frac{\epsilon''_p}{\delta_r} \right) \left(\frac{\epsilon'_s}{\epsilon'_p} \right)^{2/3} \quad \text{for } \frac{\epsilon''}{\epsilon'} \quad \dots\dots\dots (6)$$

Where,

ϵ'_s – is the dielectric constant for the material in bulk,

ϵ'_p – is the dielectric constant of powder sample at relative packing fraction (δ_r).

ϵ''_s and ϵ''_p – are the dielectric losses for solid and powder respectively.

The results obtained have been verified with values obtained from Bottcher's equation (Bottcher, 1952).

$$\epsilon'_s = \frac{(2\epsilon'_p + 3\delta - 2)\{ (3\delta - 1)(\epsilon'^2_p + \epsilon''^2_p) + \epsilon'_p - 2\epsilon''^2_p \}}{(3\delta - 1)^2(\epsilon'^2_p + \epsilon''^2_p) + 2\epsilon'_p(3\delta - 1) + 1} \quad \dots\dots\dots (7)$$

Research Article

$$\epsilon''_s = \frac{2(3\delta - 1)(\epsilon''_p + \epsilon'^2_p \epsilon''_p) + \epsilon''_p (3\delta - 2) + 4 \epsilon'_p \epsilon''_p}{(3\delta - 1)^2 (\epsilon'^2_p + \epsilon''^2_p) + 2 \epsilon'_p (3\delta - 1) + 1} \dots\dots\dots (8)$$

Table 1: Values of dielectric constant (ϵ'_p), dielectric loss (ϵ''_p), loss tangent($\tan\delta$), relaxation time (τ_p), conductivity (σ_p) and moisture percentage of Neam leaves powder at different temperatures and packing fraction (δ_r)

Temp °C	Packing Fraction (δ_r)	ϵ'_p	ϵ''_p	$\tan\delta$	τ_p (p.s.)	σ_p (10^{-2})	Moisture (%)
20°C	0.8736	2.603	0.265	0.102	1.64	14.48	0.559
	0.9548	2.725	0.347	0.127	2.06	19.01	0.463
	1.00	3.186	0.562	0.176	2.85	30.76	0.294
35°C	0.8736	2.565	0.245	0.096	1.54	13.43	0.453
	0.9548	2.701	0.331	0.122	1.98	18.12	0.310
	1.00	3.025	0.449	0.148	2.40	24.57	0.201
50°C	0.8736	2.520	0.230	0.091	1.48	12.60	0.431
	0.9548	2.653	0.302	0.114	1.84	16.52	0.300
	1.00	2.722	0.335	0.123	1.99	18.34	0.173

Table 2: Measured and calculated values of dielectric constant (ϵ'_s), and dielectric loss (ϵ''_s) for bulk from powder at different temperatures and packing fraction (δ_r)

Temp °C	Relative Packing fraction (δ_r)	ϵ' s For solid bulk			ϵ'' s For solid bulk		
		Measured	Calculated From Bottcher's formula	Calculated From Landu, <i>et al.</i> , formula	Measured	Calculated From Bottcher's formula	Calculated From Landu, <i>et al.</i> , formula
20°C	0.8736	3.186	2.906	2.881	0.562	0.326	0.320
	0.9548		2.829	2.795		0.373	0.371
	1.00		3.187	3.11		0.562	0.562
35°C	0.8736	3.025	2.861	2.839	0.449	0.302	0.297
	0.9548		2.804	2.773		0.355	0.353
	1.00		3.025	2.980		0.449	0.449
50°C	0.8736	2.722	2.805	2.790	0.335	0.203	0.279
	0.9548		2.753	2.726		0.324	0.322
	1.00		2.609	2.690		0.317	0.335

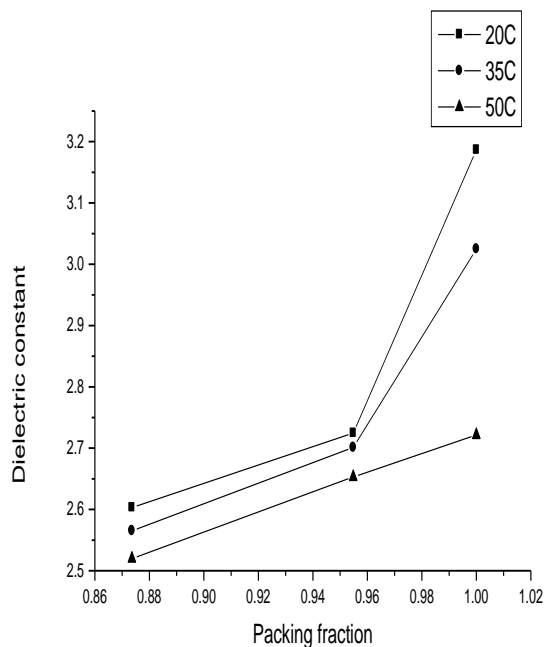


Fig.1: Packing fraction Vs Dielectric constant

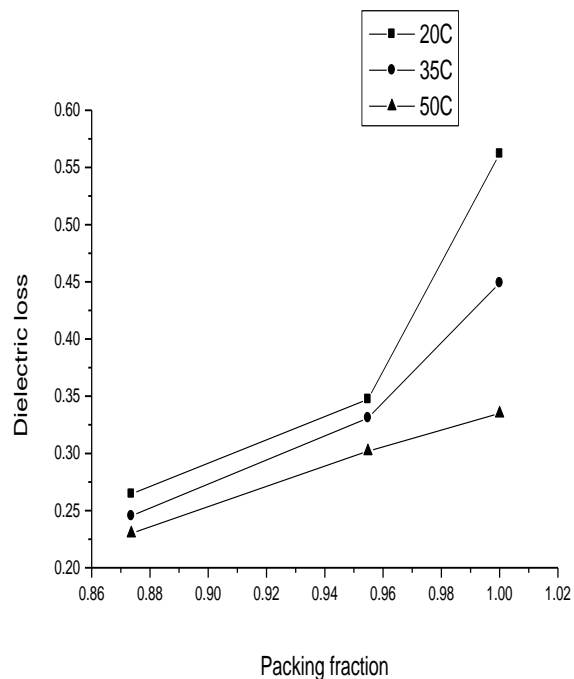


Fig.2 : Packing fraction Vs Dielectric loss

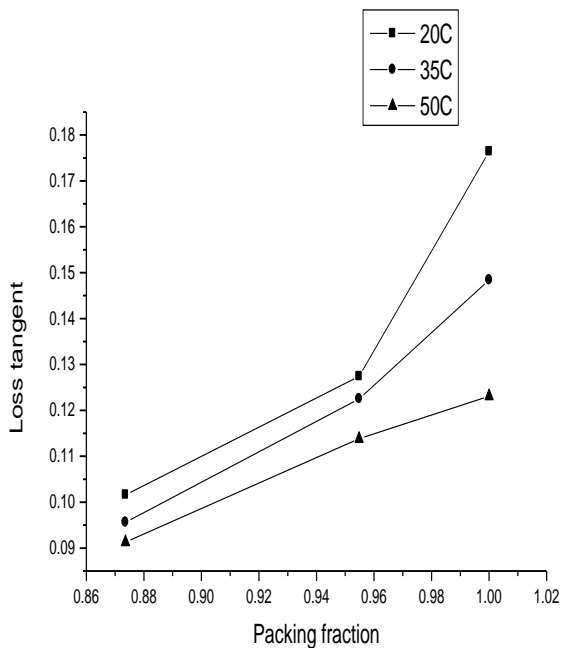


Fig.3 : Packing fraction Vs Loss tangent

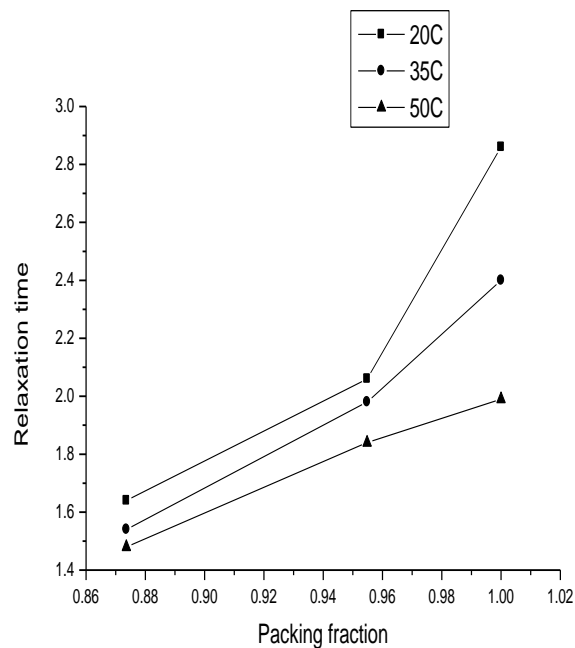


Fig.4 : Packing fraction Vs Relaxation time

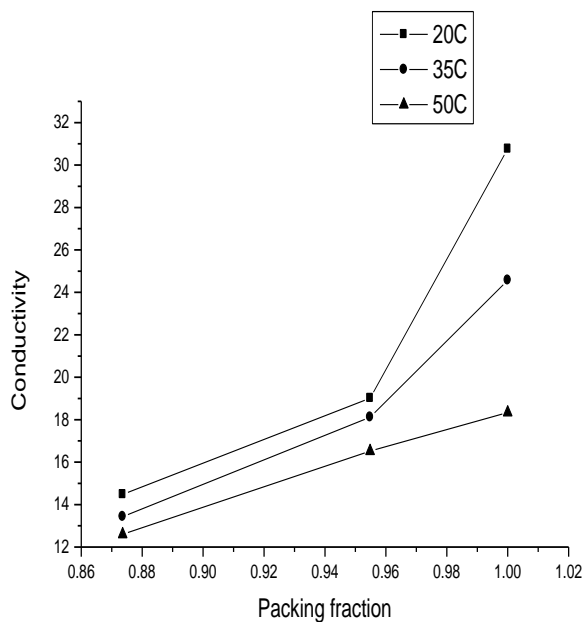


Fig.5 : Packing fraction Vs Conductivity

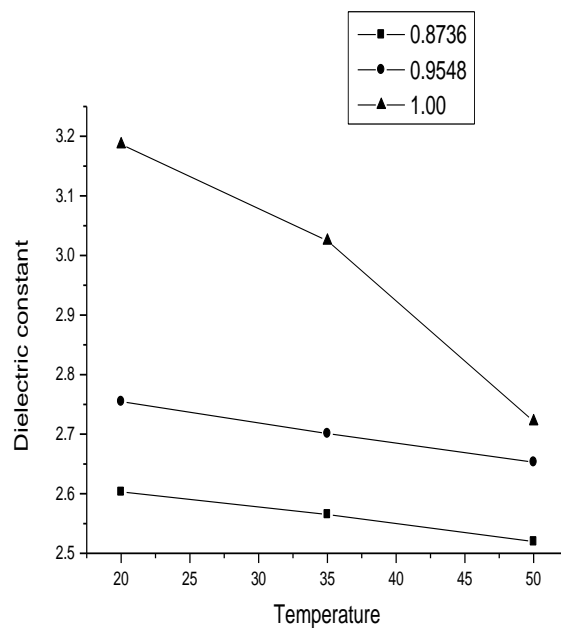


Fig.6 : Temperature Vs Dielectric constant

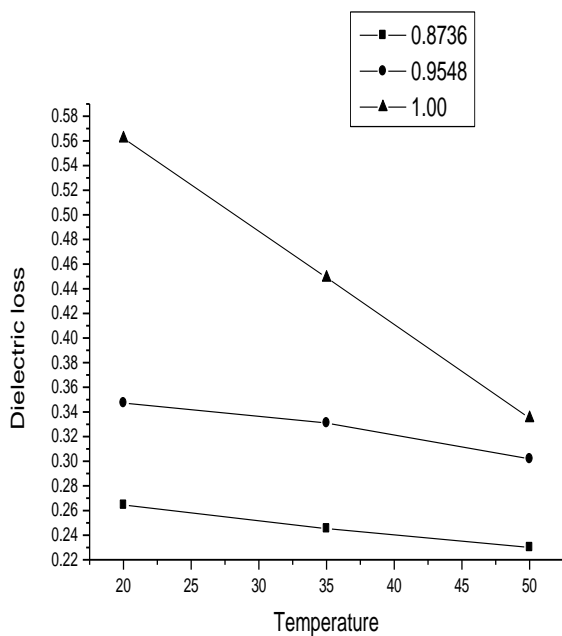


Fig.7 : Temperature Vs Dielectric loss

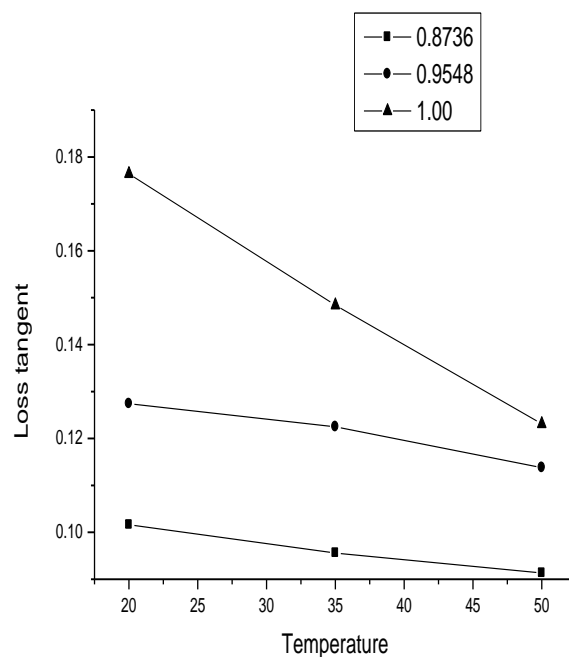


Fig.8: Temperature Vs Loss tangent

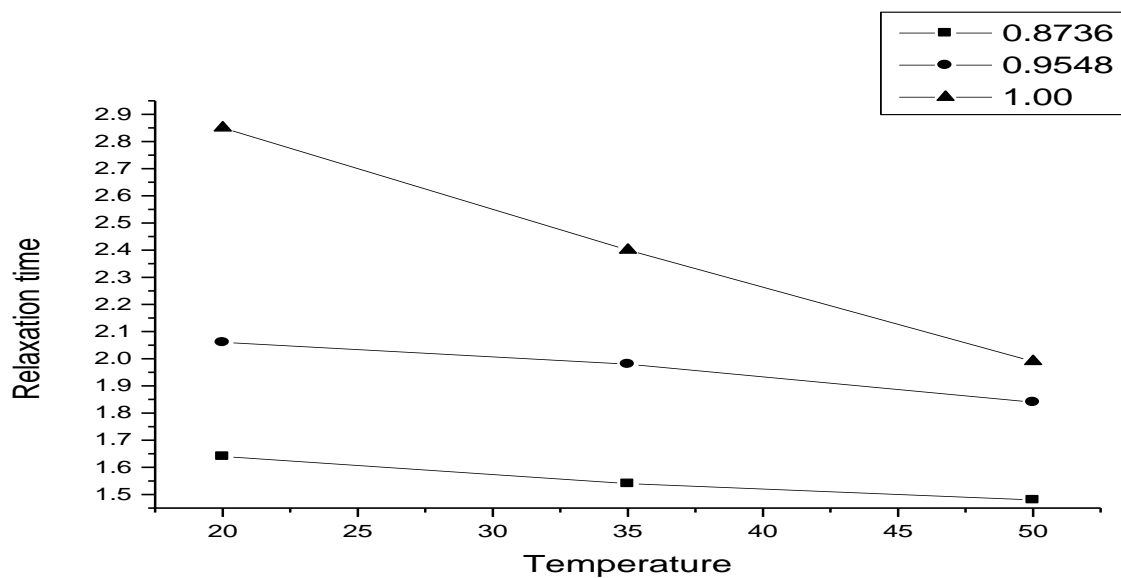


Fig.9 : Temperature Vs Relaxation time

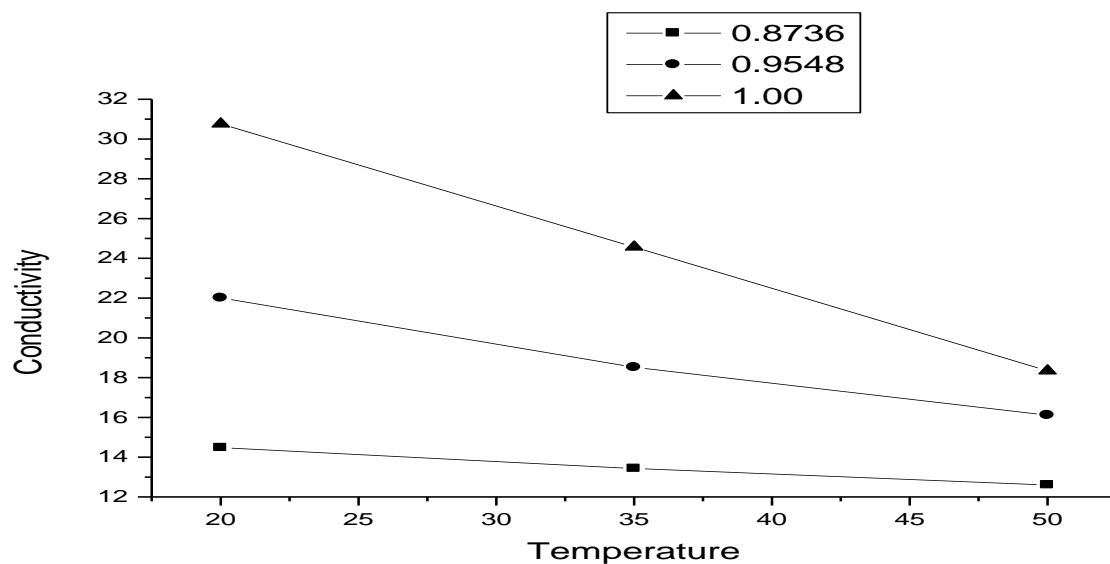


Fig.10 : Temperature Vs Conductivity

Research Article

RESULTS AND DISCUSSION

Dielectric constant (ϵ') and dielectric loss (ϵ'') along with the values of relative packing fraction (δr) of *Azardichita Indica*- leaves powder are given in table -1. The values of (ϵ'_p) and (ϵ''_p) obtained experimentally for different grain sizes and temperature showed that, there is simultaneous increase in dielectric constant (ϵ') and loss factor (ϵ'') with increasing temperature. This was expected, because with higher values of relative packing fraction (δr) the inter particle hindrance offered to the dipolar motion for a compact medium will be much higher than for less bounded particles. Such observations have been already made by other workers (Bhatnagar, 1996; Sisodia, 1990; Gandhi, 1992) for higher values of packing fraction.

Values of relaxation time (τ_p) loss tangent ($\tan\delta$) conductivity (σ_p) and values of moisture content with relative packing fraction and different temperature revealed that there was increase in σ_p , τ_p and $\tan\delta$ with the increasing values of packing fraction (δr). There was systematic decrease in σ_p , τ_p and $\tan\delta$, moisture percentage with increasing values of temperature. Such behavior is expected because when polar molecules are very large, the rotator motion of the molecules is not sufficiently rapid for the attainment of equilibrium with the field. The increase in conductivity therefore suggests that at higher compactions, no micro cracks are developed in the sample due to high mechanical pressure. The decrease in relaxation time (τ_p) with increasing temperature may be due to increase in the effective length of dipole. In addition, due to increasing temperature, number of collision increase causes increase in energy loss and thereby decreasing relaxation time.

Table -2 shows measured and computed values of dielectric parameters for bulk from powder measurements. The results reported at $\delta r = 1$ are those measured on the finest crushed powder sample packed very closely in a wave-guide cell pressing it under a fixed pressure, so as to obtain minimum voids between the particles. Out of the three powder samples of different packing fractions, the samples having minimum particle size is defined as finest which is about $0.70\mu\text{m}$. In this case, we assumed it as solid bulk for getting correlation between powder and solid bulk. The correlation formulae were used to find other value for ($\delta r > 1$). The bulk values obtained for (ϵ') and (ϵ'') are same to the measured values and those calculated from (Landau and Lifshitz, 1960), are closer to the values calculated from (Bottcher CJF, 1952) formulae. The values of packing density increase linearly with the values of dielectric constant, dielectric loss and conductivity increases (Fig.1-5). There was a simultaneous decrease of dielectric constant, dielectric loss and conductivity with increase in the temperature.

CONCLUSION

It was thus, found that experimentally measured values of (ϵ') and (ϵ'') at ($\delta r = 1$) are similar to those calculated from Landau-Lifshitz-Looyenga formulae. There was agreement between the values obtained experimentally and calculated theoretically by using Bottcher's formulae. The correlation formulae of Landau-Lifshitz-Looyenga and Bottcher can be used to provide accurate estimate of (ϵ') and (ϵ'') of powder materials at known bulk densities. It may be thus, predicted that *Azardichita Indica* leaves powder is having cohesion in its particles and serve as a continuous medium.

REFERENCES

- Bansal A K, Singh PJ and Sharma KS (2001).** Microwave dielectric measurements in different varieties of rapeseed-mustard seeds in powder form. *Indian Journal of Pure and Applied Physics* **39**: 799-803.
- Bhatnagar D, Gandhi JM and Yadav JS (1996).** Estimation of dielectric behavior of bulk material using its powder. *Indian Journal of Physics* **70**(4) 539-542.
- Bottcher CJF (1952).** Theory of dielectric polarization. *Elsevier Publication, Amsterdam* 415.
- Chelkowski, A (1980).** Dielectric Physics, *Elsevier, Amsterdam*.

Research Article

Gandhi JM and Yadav J S (1992). Simple microwave technique for measuring, the dielectric parameters of solids and their powders. *Indian Journal of Pure and Applied Physics* **30** 427.

Kalamse VG and Kalamse GM (2007). Microwave dielectric cell for measurement of dielectric parameters of pulverized materials. *Lab Experiments* **7** 30-38.

Kraszewski, A. and Nelson, S. O. (1994). Determination of moisture content and bulk density of shelled corn by measurement of microwave parameter. *Journal of Agricultural Engineering Research* **58** 37-46.

Landau LD and Lifshitz EM (1960). Electrodynamics of continuous media. *Pergamon press, London*, 46.

Nelson SO (1992). Measurement of application of dielectric properties of agricultural products. *IEEE Transaction on Instrumentation and Measurement* **41**(1) 116-122.

Sisodia ML and Raghuvanshi GS (1990). Basic microwave techniques and Laboratory Manual, *Willey Eastern Ltd, New Delhi, India*.